

EIP-X200

XGA DLP® Projector
2000 ANSI Lumens




- ▼ 2000 ANSI Lumens, 85% uniformity, and 2000:1 contrast ratio.
- ▼ True XGA resolution. SXGA, SVGA, VGA and MAC compatible.
- ▼ Smart data compression/expansion, and video scaling.
- ▼ Accepts Composite, S, and Component Video, both 4:3 and 16:9.
- ▼ Compatible with HD input resolution up to 1080i.
- ▼ Converts Interlace to Progressive Scan.
- ▼ Convenient manual zoom (1.15X) and focus lens.
- ▼ Built in image offset. Vertical digital keystone correction.
- ▼ Power management and Eco mode help prolong lamp life.
- ▼ Selectable menu position and timeout. Auto input selection.
- ▼ Wireless remote control. Carrying Case included.



Compact, lightweight, and bright, this economical data/video projector is a low cost solution for classrooms, training rooms, and meeting rooms.

EIKI
Projectors... and more!

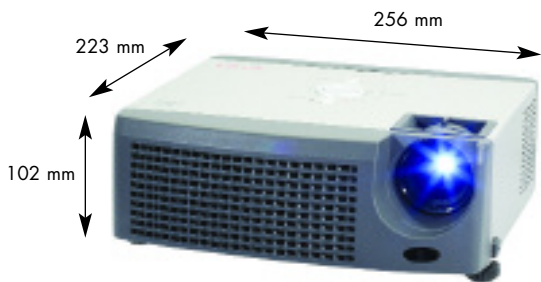

Input Panel



Top-Mounted Control



Wireless Remote Control



Lamp Contains Mercury.
Do not put in trash. Dispose-of-as
Hazardous Waste, according to the
laws in your jurisdiction.

INCLUDED ACCESSORIES:

Quick Start Guide. Owner's Manual on CD. AC Power Cord.
Lens Cover. VGA-type Computer Input Cable (HD15~HD15).
Composite Video Cable. S-Video Cable. Audio Cable.
Wireless Remote Control & Lithium Battery. Carrying Case


OPTIONAL ACCESSORIES:

Replacement Lamp. Component Video Input Cable (HD15~3-RCA).
DB9~DB9 cable for RS-232 control. Ceiling Mount. Ceiling Post
and Plate. EZ-250 Local Control. NPC-1 Network Control.

SPECIFICATIONS: EIP-X200

Brightness	up to 2000 ANSI Lumens
Illumination Uniformity	85%
Size of Color Palette	16.7 Million
Contrast Ratio	up to 2000:1
Projection Lamp	200 Watt UHP
Estimated Lamp Life	up to 2000 Hours of Use
Imaging System	0.55 DMD
Screen Pixels	1024 x 768 in stripe configuration
Total Pixels	786,432 ((1024 x 768) x 1)
Lens Type	Manual Zoom and Focus
Lens Specs	Speed: f:2.4~2.58; FL:19~21.9 mm (0.748~0.862 in.)
Lens Ratios	Zoom Max:Min: 1.15:1; Throw:Width: 1.74~2.04:1
Image Diagonal	73.7~726.4 cm (29~286 in.)
Image Width	0.63~5.7 m (2.07~18.52 ft.)
Throw Distance (tele~wide)	1.2~10 m (3.94~32.8 ft.)
Front Elevation	up to 9° Up
Anti Keystone	image starts 14.5% of image height above lens center
Vertical Keystone Correction	Digital: up to 15° up or down
Scanning Frequency	Auto: H Sync. 31-79kHz; V Sync. 56-85Hz
Dot Clock	108 MHz
Image Orientation	Normal, Reversed, Inverted
Local Control/Power Management	Full Function/Auto Shutdown
Remote Projector Control	Wireless (Infra red) x 1
RS-232 Control Port	DB9 x 1
Firmware Update Port	USB-B x 1
Computer Native Resolution	1024 x 768 (XGA)
Computer: Compatibility	SXGA, XGA, SVGA & VGA & MAC
Computer: Formats	1280 x 1024 through 640 x 480
Computer: Higher Resolutions	Displayed panned or Smart Compressed
Computer: Lower Resolutions	Displayed normal or Smart Expanded
Video Compatibility	NTSC/PAL/SECAM/NTSC 4.43/PAL-M&N
Video HD Compatibility	480i/p, 540p, 576i/p, 720p, 1035i, 1080i
Formats Supported	Normal 4:3 and Wide Screen 16:9
Video: Image Sizing	Video Scaling Technology
Image Signal Inputs	
1. Computer (Component Video with optional adapter)	HD15 x 1
2. S-Video:	S-Video x 1
3. Composite:	RCA x 1
Audio Signal Inputs	MiniStereo x 1
Sound – Amplifier:	2 Watt (Mono)
Sound – Speaker:	2.8 cm (1.1 in.) x 1
Fan Noise	as low as 32 dBA
Cabinet Size (HxWxD)	102 x 256 x 223 mm (4.0 x 10.1 x 8.8 in.)
Weight	3.0 kg (6.6 lb.)
Packaged Size (HxWxD)	307 x 320 x 225 mm (12.1 x 12.6 x 8.9 in.)
Packaged Weight	5.7 Kg (12.5 lb.)
Power Requirements	100-240V AC, 50/60Hz
Power Consumption	up to 250 W
Heat	up to 215 KC (853 BTU)
Power Cord	1.8M (6') Type 3, Detachable
Electrical Safety Compliance	UL/cCUL
Electromagnetic Compatibility	FCC Class B, CE Mark
Security Facilities	Kensington® Security Slot
Operating Temperature	5~35°C (41~95°F)
User Maintenance	Replace Lamp
UPC	4571194671612

Talk to your EIKI Dealer... the "pro" in projectors.



EIKI

Projectors... and more!